



# art. 0075


## saracinesca a stantuffo a 2 flange

stem gate valve with 2 flanges

vanne à piston avec 2 brides

Kolbenschieber mit 2 Flanschen

tajadera c/ pistón con doble brida

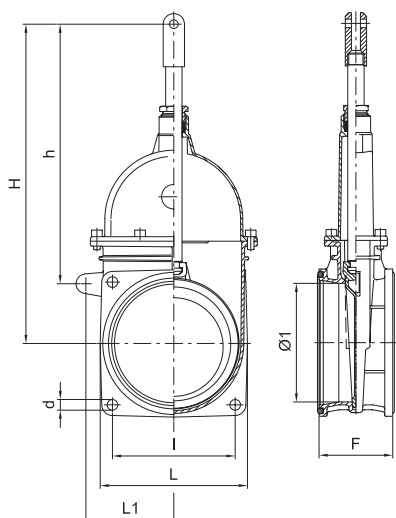

| Ø" | Codice / Code     | Ø1  | h   | H   | L   | L1    | d  | I   | F  | gr    |
|----|-------------------|-----|-----|-----|-----|-------|----|-----|----|-------|
| 6" | ARZO 0075 150 000 | 145 | 324 | 400 | 180 | 107,5 | 13 | 150 | 90 | 7.150 |


Senza asta / Without stem

| Ø" | Codice / Code     | gr    |
|----|-------------------|-------|
| 6" | ARZO 0075 150 SMO | 6.200 |




Con cilindro art. 0500 / With cylinder item 0500

| Ø" | Codice / Code     | h   | H   | gr    |
|----|-------------------|-----|-----|-------|
| 6" | ARZO 0075 150 500 | 323 | 757 | 9.790 |




Con cilindro art. 0510 / With cylinder item 0510

| Ø" | Codice / Code     | h   | H   | gr     |
|----|-------------------|-----|-----|--------|
| 6" | ARZO 0075 150 510 | 323 | 711 | 13.020 |




Con cilindro art. 0550 / With cylinder item 0550

| Ø" | Codice / Code     | h   | H   | gr    |
|----|-------------------|-----|-----|-------|
| 6" | ARZO 0075 150 550 | 323 | 573 | 8.360 |




Con cilindro art. 0570 / With cylinder item 0570

| Ø" | Codice / Code     | h   | H   | gr    |
|----|-------------------|-----|-----|-------|
| 6" | ARZO 0075 150 570 | 326 | 575 | 9.490 |




Con cilindro art. 0571 / With cylinder item 0571


| Ø" | Codice / Code     | h   | H   | gr    |
|----|-------------------|-----|-----|-------|
| 6" | ARZO 0075 150 571 | 326 | 575 | 9.520 |



Con cilindro art. 0580 / With cylinder item 0580

| Ø" | Codice / Code     | h   | H   | gr     |
|----|-------------------|-----|-----|--------|
| 6" | ARZO 0075 150 580 | 325 | 728 | 15.970 |



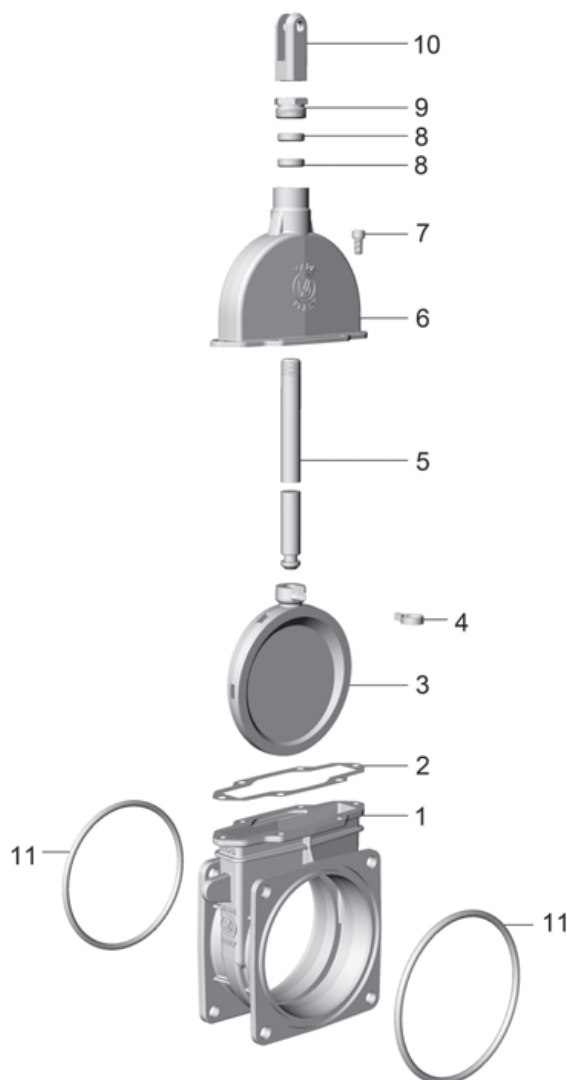

## Condizioni di esercizio

Work conditions

|        |         |
|--------|---------|
| DN     | 6"      |
| P(Bar) | 2,5     |
| P(PSI) | 35      |
| T °C   | -15 +80 |

| POS. | CODICE / CODE     | DENOMINAZIONE              | DENOMINATION                 | MATERIALE             | MATERIAL                 |
|------|-------------------|----------------------------|------------------------------|-----------------------|--------------------------|
| 1    | FOZO 0075 150 001 | CORPO 6"                   | BODY 6"                      | OTTONE UNI EN 1982    | UNI EN 1982 BRASS        |
| 2    | GGUA 0075 150 004 | GUARNIZIONE 6"             | GASKET 6"                    | GUAMOTOR              | GUAMOTOR                 |
| 3    | FOZO 0070 150 002 | CUNEO 6"                   | GATE 6"                      | OTTONE UNI EN 1982    | UNI EN 1982 BRASS        |
| 4    | SAZO 0040 100 011 | FASCETTA DI BLOCCAGGIO Ø20 | LOCKING CLAMP Ø20            | ACCIAIO INOX AISI 304 | AISI 304 STAINLESS STEEL |
| 5    | TOZO 0040 150 003 | ASTA 6"                    | STEM 6"                      | OTTONE UNI EN 12164   | UNI EN 12164 BRASS       |
| 6    | FOZO 0075 150 005 | TESTATA 6"                 | HEAD 6"                      | OTTONE UNI EN 1982    | UNI EN 1982 BRASS        |
| 7    | VTAC 0020 100 009 | VITE TCEI M8×16            | SCREW TCEI M8×16             | ACCIAIO INOX AISI 304 | AISI 304 STAINLESS STEEL |
| 8    | SPZO 0040 100 006 | GUARNIZIONE Ø27 × 20 × 8   | GASKET Ø27 × 20 × 8          | POLIMERO              | POLYMER                  |
| 9    | TOZO 0040 100 007 | PREMISTOPPA M30×2          | NUT M30×2                    | OTTONE UNI EN 12164   | UNI EN 12164 BRASS       |
| 10   | FOZO 0040 100 008 | FORCELLA                   | FORK                         | OTTONE UNI EN 1982    | UNI EN 1982 BRASS        |
| 11   | ..OR 0020 100 010 | OR 225 (Øi 159,5 × 6,99)   | O RING 225 (Øi 159,5 × 6,99) | GOMMA NBR 70          | NBR 70 RUBBER            |