


尺寸: 210x297mm  
 材质: 四色印, 105g双铜



● Includes




● Charging

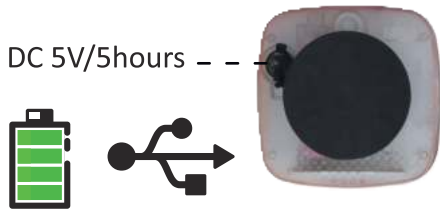


● Installation



● Mounting

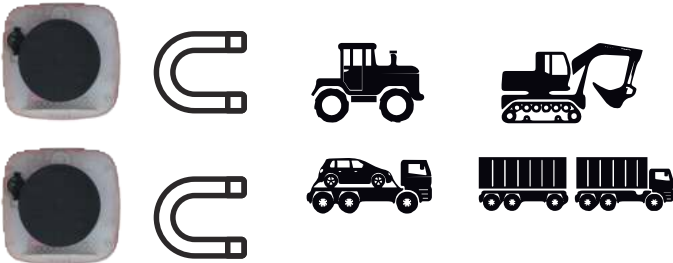

● Dimension

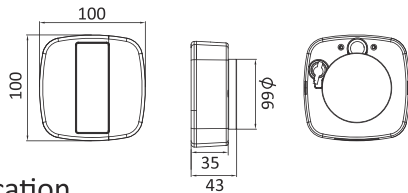

● Specification

Functions	↔ ⚡ ⚠ 000000
Input voltage	DC 5V
Working Frequency	2.4 G
Radio communication range	50 Meters
Battery capacity	2000 MAH
Charging time	5 hours
Waterproof level	IP65
Operating temperature	-20°C~50°C
Battery time	2H - 10H

1. Fully charge battery before use
2. Check the battery life before use
3. Check light if working correctly before use
4. Charge the battery every 6months if not in use
5. Replacement light & additional light must be paired before use
6. Check light regularly when use for long hours
7. Always consult your vehicle owner's manual on compatibility with trailer lighting
8. The data of specification is for your reference, that it depends on the road condition and driving habit



● Pairing



● Re-Pairing

The lights come pre-paired from the factory, the below instructions only need to be followed when the lights become unpaired

- Connect the 7 pin transmitter on vehicle, turn on the double flashing emergency light, hit the brake pedal.
- Press the power switches on the back of each light, the switches will show a blue blinking light. Then press and hold the power switches for 3 seconds and the tail light will start flashing.
- Press the rear position switch on vehicle 3 times, (on-off-on-off-on).

● Testing



Wireless magnetic light set

INSTRUCTION

RED

- EN IEC 55015:2019
- EN IEC 55015:2019/A11:2020
- EN 61547:2009
- EN IEC 61000-3-2:2019/A1:2021
- EN 61000-3-3:2013/A2:2021
- ETSI EN 301 489-1 V2.2.3
- ETSI EN 301 489-3 V2.1.1
- EN IEC 62311
- EN 300 440 V2.2.1
- EN 60598

