

ADX RDX

Flat fan nozzle with air injection




Flat fan nozzle with air injection:

- ▶ Spray angle 120°:
precision and uniformity of application achieved at reduced height
- ▶ Working pressure: 1.5 to 6 bar
large working pressure range while controlling the risk of drift (300 to 500 μ m)
- ▶ Buffer zone approved – Drift reduction rate of 66, 75 or 90% depending on size and pressure
- ▶ Ceramic (ADX) or POM (RDX) insert

Droplet size classification according to ISO 25358 DSD

Category	Symbol
Ultra coarse	UC
Extremely coarse	XC
Very coarse	VC
Coarse	C
Medium	M
Fine	F
Very fine	VF
Extremely fine	XF

nozAL
A broad field of applications

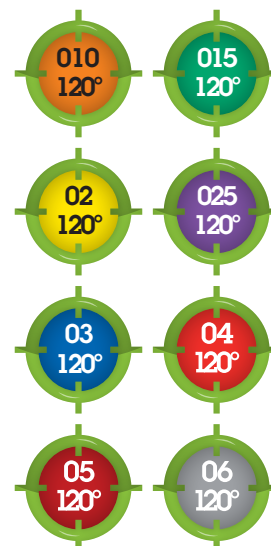

ISO colour code



USE CASES:


Particularly suitable for applications:

- ▶ requiring good coverage while reducing drift.
- ▶ with contact, systemic, root or other mode of action

Angle allowing the working height to be reduced while maintaining a uniform application

Compatibility: standard / multi-nozzle / PWM

Design:

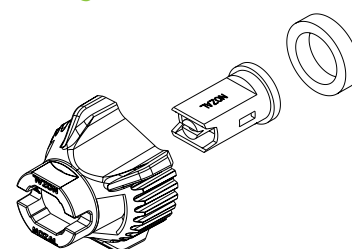

ADX RDX range

Flow ℓ/ha according to the forward speed in km/h - 0.50 m nozzle spacing

	Droplet size	Pressure (bar)	l/min at the nozzle*	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h
ADX - RDX 120 - 01 Orange (80 M)**	XC	1	0.23	55	46	39	35	31						
	VC	1.5	0.28	67	56	48	42	37	34					
	VC	2	0.32	77	64	55	48	43	38					
	VC	2.5	0.36	86	72	62	54	48	43	36				
	VC	3	0.39	94	78	67	59	52	47	39				
	C	3.5	0.42	101	84	72	63	56	50	42	36			
	C	4	0.45	108	90	77	68	60	54	45	39	34		
	C	4.5	0.48	115	96	82	72	64	58	48	41	36		
	M	5	0.51	122	102	87	77	68	61	51	44	38	34	
M	6	0.55	132	110	94	83	73	66	55	47	41	37		
ADX - RDX 120 - 015 Green (60 M)**	XC	1	0.34	82	68	58	51	45	41	34	29			
	VC	1.5	0.42	101	84	72	63	56	50	42	36	32	28	25
	VC	2	0.48	115	96	82	72	64	58	48	41	36	32	29
	VC	2.5	0.54	130	108	93	81	72	65	54	46	41	36	32
	C	3	0.59	142	118	101	89	79	71	59	51	44	39	35
	C	3.5	0.63	151	126	108	95	84	76	63	54	47	42	38
	C	4	0.68	163	136	117	102	91	82	68	58	51	45	41
	M	5	0.75	180	150	129	113	100	90	75	64	56	50	45
	M	6	0.83	199	166	142	125	111	100	83	71	62	55	50
ADX - RDX 120 - 02 Yellow (60 M)**	XC	1	0.46	110	92	79	69	61	55	46	39	35	31	28
	VC	1.5	0.56	134	112	96	84	75	67	56	48	42	37	34
	VC	2	0.65	156	130	111	98	87	78	65	56	49	43	39
	VC	2.5	0.73	175	146	125	110	97	88	73	63	55	49	44
	VC	3	0.8	192	160	137	120	107	96	80	69	60	53	48
	C	3.5	0.86	206	172	147	129	115	103	86	74	65	57	52
	C	4	0.92	221	184	158	138	123	110	92	79	69	61	55
	M	5	1.02	245	204	175	153	136	122	102	87	77	68	61
	M	6	1.13	271	226	194	170	151	136	113	97	85	75	68
ADX - RDX 120 - 025 Purple (60 M)**	XC	1	0.57	137	114	98	86	76	68	57	49	43	38	34
	VC	1.5	0.7	168	140	120	105	93	84	70	60	53	47	42
	VC	2	0.81	194	162	139	122	108	97	81	69	61	54	49
	VC	2.5	0.91	218	182	156	137	121	109	91	78	68	61	55
	C	3	0.99	238	198	170	149	132	119	99	85	74	66	59
	C	3.5	1.07	257	214	183	161	143	128	107	92	80	71	64
	C	4	1.15	276	230	197	173	153	138	115	99	86	77	69
	M	5	1.28	307	256	219	192	171	154	128	110	96	85	77
	M	6	1.4	336	280	240	210	187	168	140	120	105	93	84
ADX - RDX 120 - 03 Blue (60 M)**	XC	1	0.69	166	138	118	104	92	83	69	59	52	46	41
	VC	1.5	0.84	202	168	144	126	112	101	84	72	63	56	50
	VC	2	0.97	233	194	166	146	129	116	97	83	73	65	58
	VC	2.5	1.08	259	216	185	162	144	130	108	93	81	72	65
	VC	3	1.19	286	238	204	179	159	143	119	102	89	79	71
	C	3.5	1.28	307	256	219	192	171	154	128	110	96	85	77
	C	4	1.37	329	274	235	206	183	164	137	117	103	91	82
	M	5	1.53	367	306	262	230	204	184	153	131	115	102	92
	M	6	1.68	403	336	288	252	224	202	168	144	126	112	101
ADX - RDX 120 - 04 Red (60 M)**	UC	1	0.91	218	182	156	137	121	109	91	78	68	61	55
	XC	1.5	1.12	269	224	192	168	149	134	112	96	84	75	67
	XC	2	1.29	310	258	221	194	172	155	129	111	97	86	77
	VC	2.5	1.44	346	288	247	216	192	173	144	123	108	96	86
	VC	3	1.58	379	316	271	237	211	190	158	135	119	105	95
	VC	3.5	1.7	408	340	291	255	227	204	170	146	128	113	102
	C	4	1.82	437	364	312	273	243	218	182	156	137	121	109
	C	5	2.04	490	408	350	306	272	245	204	175	153	136	122
	C	6	2.23	535	446	382	335	297	268	223	191	167	149	134
ADX - RDX 120 - 05 Brown (25 M)**	XC	1	1.14	274	228	195	171	152	137	114	98	86	76	68
	XC	1.5	1.39	334	278	238	209	185	167	139	119	104	93	83
	VC	2	1.61	386	322	276	242	215	193	161	138	121	107	97
	VC	2.5	1.8	432	360	309	270	240	216	180	154	135	120	108
	VC	3	1.97	473	394	338	296	263	236	197	169	148	131	118
	VC	3.5	2.12	509	424	363	318	283	254	212	182	159	141	127
	VC	4	2.28	547	456	391	342	304	274	228	195	171	152	137
	C	5	2.55	612	510	437	383	340	306	255	219	191	170	153
	C	6	2.79	670	558	478	419	372	335	279	239	209	186	167
RDX 120 - 06 Grey (25 M)**	XC	1	1.36	326	272	233	204	181	163	136	117	102	91	82
	VC	1.5	1.67	401	334	286	251	223	200	167	143	125	111	100
	VC	2	1.93	463	386	331	290	257	232	193	165	145	129	116
	VC	2.5	2.16	518	432	370	324	288	259	216	185	162	144	130
	VC	3	2.36	566	472	405	354	315	283	236	202	177	157	142
	VC	3.5	2.55	612	510	437	383	340	306	255	219	191	170	153
	C	4	2.73	655	546	468	410	364	328	273	234	205	182	164
	C	5	3.05	732	610	523	458	407	366	305	261	229	203	183
	C	6	3.34	802	668	573	501	445	401	334	286	251	223	200

** 25 M, 60 M, 80 M = recommended filtration level

Buse à injection d'air à jet pinceau




Buse à injection d'air à jet pinceau:

- ▶ Angle de 120° : précision et homogénéité d'application obtenues à hauteur réduite
- ▶ Pression de travail : 1,5 à 6 bars grande amplitude de pression de travail tout en maîtrisant le risque de dérive (300 à 500 µm)
- ▶ Buses homologuées ZNT – Taux de réduction de la dérive de 66, 75 ou 90% selon calibre et pression
- ▶ Insert en céramique (ADX) ou POM (RDX)

Classification taille des goutelettes selon norme ISO 25358 DSD

Catégorie	Symbole
Extrêmement gros	XC
Très gros	VC
Gros	C
Moyen	M
Fin	F
Très fin	UF
Extrêmement fin	XF

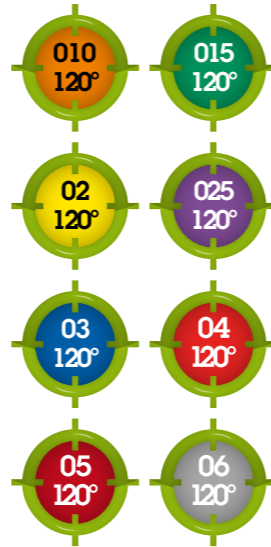

Code couleur ISO



CAS D'USAGE :


Particulièrement adaptée pour les applications :

- ▶ nécessitant une bonne couverture tout en réduisant la dérive.
- ▶ avec tout mode d'action par contact, systémique, racinaire...

Angle permettant de réduire la hauteur de travail tout en conservant l'homogénéité d'application

Compatibilité : standard / multibuses / PWM

Conception :

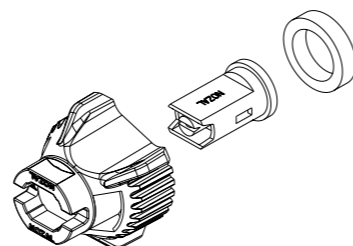

Débit l/ha en fonction des vitesses d'avancement en km/h - entraxe buses à 0,50 m

Taille des goutelettes	Pression (bar)	l/min à la buse*	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h
ADX - RDX 120 - 01 Orange (80 M)**	XC	1	0,23	55	46	39	35	31					
	VC	1,5	0,28	67	56	48	42	37	34				
	VC	2	0,32	77	64	55	48	43	38				
	VC	2,5	0,36	86	72	62	54	48	43	36			
	VC	3	0,39	94	78	67	59	52	47	39			
	C	3,5	0,42	101	84	72	63	56	50	42	36		
	C	4	0,45	108	90	77	68	60	54	45	39	34	
	C	4,5	0,48	115	96	82	72	64	58	48	41	36	
	M	5	0,51	122	102	87	77	68	61	51	44	38	34
	M	6	0,55	132	110	94	83	73	66	55	47	41	37
*Selon ISO 25358													
ADX - RDX 120 - 015 Vert (60 M)**	XC	1	0,34	82	68	58	51	45	41	34	29		
	VC	1,5	0,42	101	84	72	63	56	50	42	36	32	28
	VC	2	0,48	115	96	82	72	64	58	48	41	36	32
	VC	2,5	0,54	130	108	93	81	72	65	54	46	41	36
	C	3	0,59	142	118	101	89	79	71	59	51	44	39
	C	3,5	0,63	151	126	108	95	84	76	63	54	47	42
	C	4	0,68	163	136	117	102	91	82	68	58	51	45
	C	4,5	0,72	174	146	125	110	98	88	75	64	56	50
	M	5	0,75	180	150	129	113	100	90	75	64	56	50
	M	6	0,83	199	166	142	125	111	100	83	71	62	55
ADX - RDX 120 - 02 Jaune (60 M)**	XC	1	0,46	110	92	79	69	61	55	46	39	35	28
	VC	1,5	0,56	134	112	96	84	75	67	56	48	42	37
	VC	2	0,65	156	130	111	98	87	78	65	56	49	43
	VC	2,5	0,73	175	146	125	110	97	88	73	63	55	49
	VC	3	0,8	192	160	137	120	107	96	80	69	60	53
	C	3,5	0,86	206	172	147	129	115	103	86	74	65	57
	C	4	0,92	221	184	158	138	123	110	92	79	69	61
	C	4,5	0,98	237	198	170	149	133	119	99	85	74	66
	M	5	1,02	245	204	175	153	136	122	102	87	77	68
	M	6	1,13	271	226	194	170	151	136	113	97	85	75
ADX - RDX 120 - 025 Violet (60 M)**	XC	1	0,57	137	114	98	86	76	68	57	49	43	38
	VC	1,5	0,7	168	140	120	105	93	84	70	60	53	47
	VC	2	0,81	194	162	139	122	108	97	81	69	61	54
	VC	2,5	0,91	218	182	156	137	121	109	91	78	68	61
	C	3	0,99	238	198	170	149	132	119	99	85	74	66
	C	3,5	1,07	257	214	183	161	143	128	107	92	80	71
	C	4	1,15	276	230	197	173	153	138	115	99	86	77
	C	4,5	1,23	295	246	211	185	163	145	121	104	91	82
	M	5	1,28	307	256	219	192	171	154	128	110	96	85
	M	6	1,4	336	280	240	210	187	168	140	120	105	93
ADX - RDX 120 - 03 Bleu (60 M)**	XC	1	0,69	166	138	118	104	92	83	69	59	52	46
	VC	1,5	0,84	202	168	144	126	112	101	84	72	63	56
	VC	2	0,97	233	194	166	146	129	116	97	83	73	65
	VC	2,5	1,08	259	216	185	162	144	130	108	93	81	72
	VC	3	1,19	286	238	204	179	159	143	119	102	89	79
	C	3,5	1,28	307	256	219	192	171	154	128	110	96	85
	C	4	1,37	329	274	235	206	183	164	137	117	103	91
	C	4,5	1,46	351	294	251	218	193	171	143	122	107	95
	M	5	1,53	367	306	262	230	204	184	153	131	115	102
	M	6	1,68	403	336	288	252	224	202	168	144	126	112
ADX - RDX 120 - 04 Rouge (60 M)**	UC	1	0,91	218	182	156	137	121	109	91	78	68	61
	XC	1,5	1,12	269	224	192	168	149	134	112	96	84	75
	XC	2	1,29	310	258	221	194	172	155	129	111	97	86
	VC	2,5	1,44	346	288	247	216	192	173	144	123	108	96
	VC	3	1,58	379	316	271	237	211	190	158	135	119	105
	VC	3,5	1,7	408	340	291	255	227	204	170	146	128	113
	C	4	1,82	437	364	312	273	243	218	182	156	137	121
	C	5	2,04	490	408	350	306	272	245	204	175	153	136
	C	6	2,23	535	446	382	335	297	268	223	191	167	149
	ADX - RDX 120 - 05 Marron (25 M)**	XC	1	1,14	274	228	195	171	152	137	114	98	86
XC		1,5	1,39	334	278	238	209	185	167	139	119	104	93
VC		2	1,61	386	322	276	242	215	193	161	138	121	107
VC		2,5	1,8	432	360	309	270	240	216	180	154	135	120
VC		3	1,97	473	394	338	296	263	236	197	169	148	131
VC		3,5	2,12	509	424	363	318	283	254	212	182	159	141
VC		4	2,28	547	456	391	342	304	274	228	195	171	152
C		5	2,55	612	510	437	383	340	306	255	219	191	170
C		6	2,79	670	558	478	419	372	335	279	239	209	186
RDX 120 - 06 Gris (25 M)**		XC	1	1,36	326	272	233	204	181	163	136	117	102
	VC	1,5	1,67	401	334	286	251	223	200	167	143	125	111
	VC	2	1,93	463	386	331	290	257	232	193	165	145	129
	VC	2,5	2,16	518	432	370	324	288	259	216	185	162	144
	VC	3	2,36	566	472	405	354	315	283	236	202	177	157
	VC	3,5	2,55	612	510	437	383	340	306	255	219	191	170
	C	4	2,73	655	546	468	410	364	328	273	234	205	182
	C	5	3,05	732	610	523	458	407	366	305	261	229	203
	C	6	3,34	802	668	573	501	445	401	334	286	251	223

** 25 M, 60 M, 80 M = niveau de filtration conseillé