


HOSE ROOM ON WHEELS

FIELD SERVICE & MOBILE / CONTAINER WORKSHOP

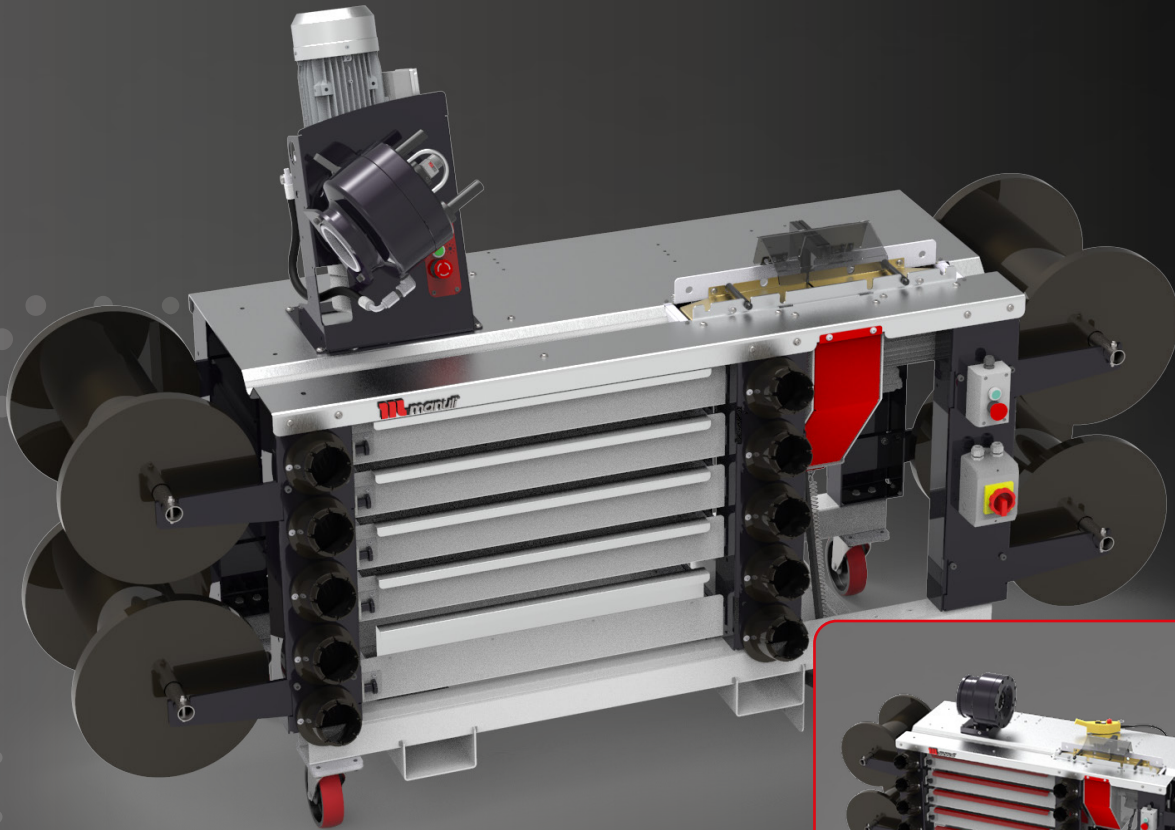

MRB 137 EVO R version

MV 240 L version

TECHNICAL SPECIFICATIONS

	MRB 137 EVO R	MV 240 L
CAPACITY*	4WS - 1 1/4"	
CRIMP FORCE	137 t	240 t
CRIMP RANGE	4 - 70 mm (0.157 - 2.756")	4-76 mm (0.157 - 2.992")
MOTOR	6 kW; 7 kW; 8 kW	5 kW; 7 kW; 8 kW
NET WEIGHT	910 kg	950 kg
DIMENSIONS	2,487 x 810 x 1,661 mm (98 x 32 x 65")	2,487 x 810 x 1,370 mm (98 x 32 x 54")
VOLTAGES	208/240V 3PH 60Hz 220/240V 1PH 50Hz 220/240V 1PH 60Hz 220/240V 3PH 50Hz 380/415V 3PH+N 50Hz	
STANDARD DIES	15, 18, 21, 24, 27, 30, 33, 36, 39, 42, 45, 48, 51	15, 18, 21, 24, 27, 30, 33, 36, 39, 42, 45, 48, 51, 57, 62, 66, 70

*Indicative capacities depending on hose and fitting type

KEY FEATURES

- Robust design
- Available with MRB 137 EVO R and MV 240 L crimping heads
- Integrated cutting machine
- Easy hose spool loading / unloading
- Ball-bearing slide drawers
- Lockable castors
- Remote controller (*MV 240 L version only*)
- Wide range of customisation options available on request (*contact your Manuli sales representative for details*)