




Mastercool[®] Inc.

"World Class Quality"

DYE INJECTION and UV LEAK DETECTION

PLEASE USE CAUTION!

- When injecting dye into a pressurized system, **ALWAYS** wear UV safety glasses and gloves!
- Never breathe refrigerant vapors!
- Never use the UV light without wearing UV glasses!

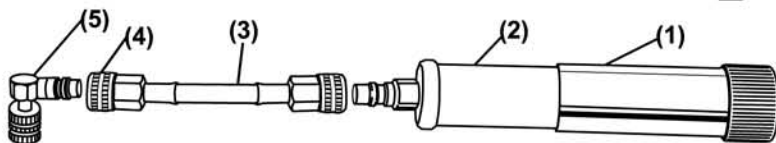

Dye Injection Instructions:

A. Purging air from the hose assembly

It is important to eliminate any air in the hose before injecting dye into the A/C system. **(This process is necessary only once for the setup)**

1. Hold the cartridge (2) upward while unscrewing the cap. Snap hose assembly (3) onto the cartridge and snap the R12 Adapter (5) to the other end of the hose.
2. While holding the assembly upward, attach the handle (1) to the bottom of the cartridge by turning it clockwise. Continue turning as dye enters the hose and pushes the air up. Use a pen to release the pressurized air from the end of the connector. Repeat this process as needed until dye appears at the connector's end. Disconnect the R12 adapter (5) from the hose assembly.

B. Injection


1. Turn the A/C system and engine off!
2. Connect injector to the low side service port of the A/C system. Hold body of injector. Use (I) starting line on handle end as a guide. Turn handle clockwise to inject 1 application of dye.
(Approximately 1 to 1 1/4 turn(s) for each application).
3. Disconnect injector from the system and clean any excess dye left around the service port.

A/C Fluorescent Dye	
AUTOMOTIVE	1 Application per system (for a system using up to 10 oz [300 ml] of lubricant)
HVAC/R	1 Application per system (for a system using up to 7 lbs [3.2 kg] of refrigerant)

Leak Detection Using a UV Light:

- A. Turn engine and A/C system on.
- B. Allow dye to circulate throughout system.
- C. **WEAR PROTECTIVE GLASSES!!**
- D. Press the UV light on. Search for a bright green/yellow glow where the system is leaking. Clean the area around leak after repair.

REPLACEMENT PARTS

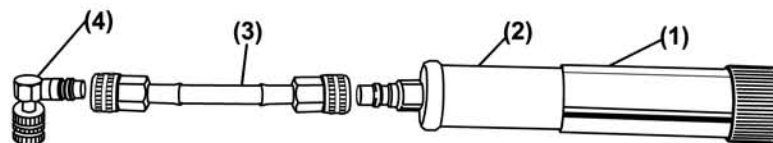

(Fig.)	Part#	Description
1	53223-001	Handle
2	53825	Replacement Cartridge (25 Applications)
3	53825-002	Hose Assembly
4	90333-UV	R12 1/4" FL Shut-Off Valve

For Warranty Service:
Toll Free: 1-888-825-6989 or
E-mail: techs@mastercool.com



Mastercool[®] Inc.

"World Class Quality"

One Aspen Drive, Randolph, NJ 07869-1103

55300 INST